# Mountable USB 2.0 cable A female with 2 screws to A male 50cm



**Product number** CU-VLMG-05
**Length** 500mm

## Product description

Mountable USB cable for industrial applications, plug type A (male) to type A female (mountable with 2 screws), 50cm, double shielded, twisted pair, for USB 1.1 und USB 2.0 (up 480 MBit/s)

## Specifications

- USB 2.0 panel mount cable / USB rear cable
- connector 1: mountable USB 2.0 type A female (with screws)
- the molded screw-style A connector enables easy connection to a faceplate or machined port
- screw distance (A female side): 26mm
- connector 2: USB 2.0 type A male
- high quality cable
- double shielded: foil and braid shielding reduces EMI/RFI interference
- copper wires with 28 AWG/1P (data, twisted pair), 24 AWG/2C (5V)
- twisted pair construction helps to reduce crosstalk thus ensuring high speed and error-free data transfer
- UL cable material E238846 UL AWM 2725 80°C  30V VW-1  28AWG/1P 24AWG/2C USB CABLE CHINGLUNG
- cable diameter app. 5mm
- compatible USB 2.0 and backwards compliant USB 1.1
- supports USB 2.0 High Speed 480 Mbps, USB 1.1 Full Speed 12 Mbps, USB-1.1 Low Speed 1.5 Mbps
- 2 screws included (pre-assembled), screw type UNC 4/40
- RoHS compliant
- customs tariff number: 85444290
- colour: black
- e.g. for industrial applications, rear panel brackets, internal USB extensions

## More images




Schraubentyp
screw type
type de vis
UNC 4-40


26mm
Schraubenabstand
spacing of the screws
espacement des vis



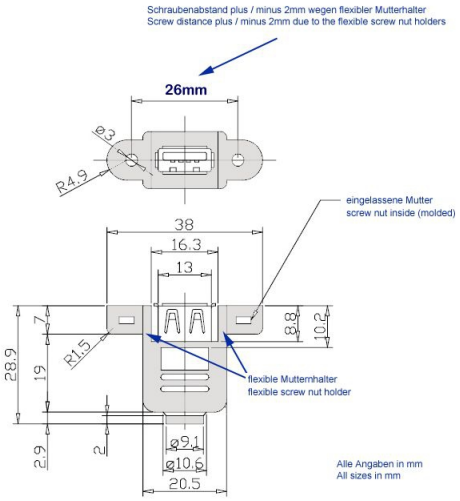
Schraubenabstand plus / minus 2mm wegen flexibler Mutterhalter
Screw distance plus / minus 2mm due to the flexible screw nut holders
26mm
Ø3
R4.9
eingelassene Mutter
screw nut inside (molded)
38
16.3
13
7
R1.5
8.8
10.2
28.9
19
2.9
2
Ø9.1
Ø10.6
20.5
flexible Muttenhalter
flexible screw nut holder
Alle Angaben in mm
All sizes in mm

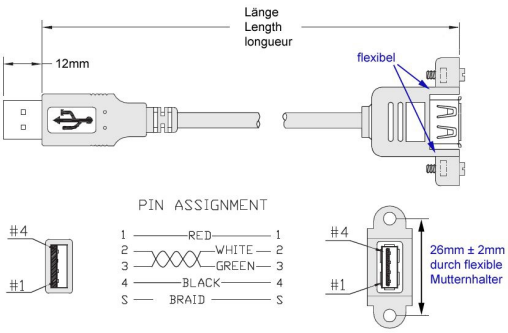
Länge
Length
longueur
12mm
flexibel
PIN ASSIGNMENT
#4
#1
1 RED 1
2 WHITE 2
3 GREEN 3
4 BLACK 4
S BRAID S
26mm ± 2mm
durch flexible
Mutternhalter

**CU-VLMG-xx**

