

# Cat. 6A Panel Mount Cable RJ45 male-female with 2 screws, 5m

**Product number** HX-NM25-50

**Length** 5000mm



## Product description

Cat. 6A Panel Mount Cable, RJ45 male-female with 2 screws, 5m


## Key features

- RJ45 panel mount cable for network Cat. 6A
- for mounting on an enclosure with corresponding cut-out
- CONNECTION 1: Screw-on RJ45 socket (8P8C, female), screw spacing 25mm (hole spacing for fastening)
- CONNECTION 2: RJ45 plug (8P8C)
- gold-plated contact surfaces guarantee an excellent, high-performance network connection
- specification: Cat. 6A, also suitable for Cat.6, Cat.5e or other RJ45 connections
- suitable for 10 Gigabit Ethernet 10BASE-T, 100BASE-TX, 1000BASE-T, 10/100/1000/10000 Mbit/s
- shielding class S/FTP (PiMF, Pairs in Metal Foil)
- also braided overall shielding (aluminium)
- high-quality thick copper conductor (CU) with AWG 27 BC (7/0.16mm, stranded)
- halogen-free: LSZH LS0H (Low Smoke Zero Halogen)
- max. bandwidth 500 Mhz
- colour: black
- colour coding/contacting: EIA/TIA 568B, assignment 1:1
- operating temperature from -20°C
- operating temperature up to 75°C
- scope of delivery: Cable incl. 2 screws (pre-assembled)
- cable diameter (approx.): 5.8 mm
- plug bend protection sleeve and latching lug protection
- CE, WEEE, RoHS compliant


More images




Typ des Rastnasenschutzes kann variieren.  
Type of latching nose guard can vary.  
Le type de protection de l'ergot peut varier.

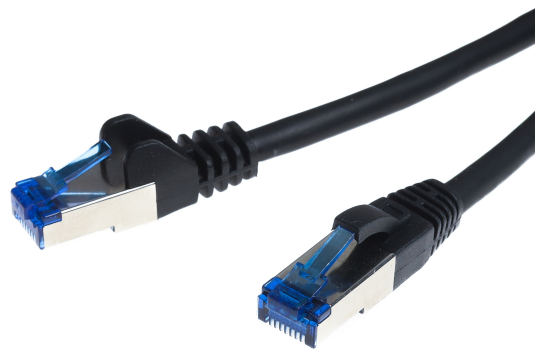


## With RJ45 Connectors for extending network components

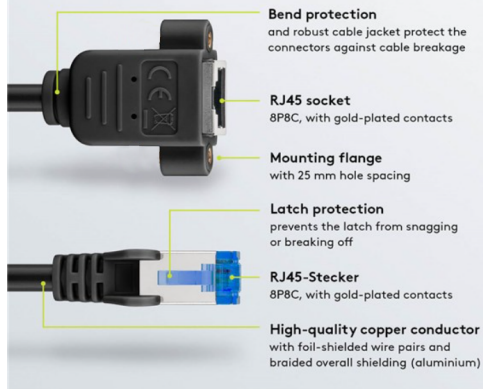

**Cat.6A**

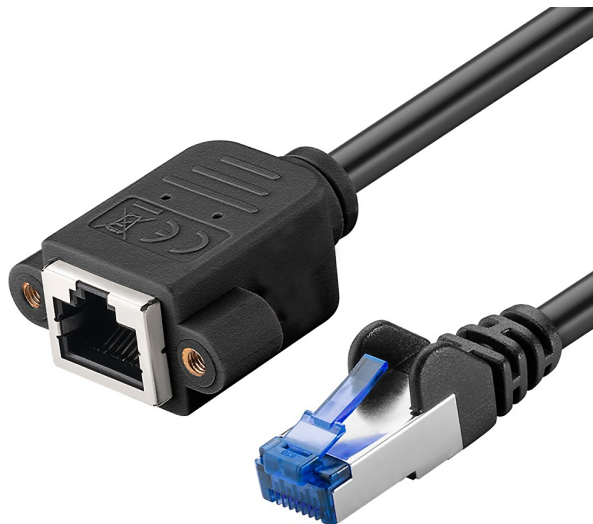

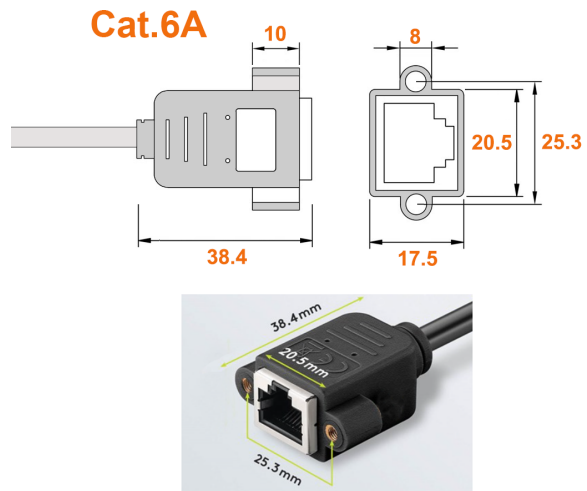

## Technical Data

at a glance

- ✓ **Bandwidth**  
max. 500 MHz
- ✓ **Supports**  
10GBase-T networks  
for 10-gigabit Ethernet
- ✓ **Compatible**  
with 10/100/1000/10000 Mbit/s,  
10BASE-T, 100BASE-TX,  
1000BASE-T
- ✓ **Pair sequence**  
according to EIA/TIA-568B
- ✓ **LSZH-compliant**  
low smoke & zero halogen

