

USB Type-C™ panel mount cable, female to male, 20cm

Product number HX-M2-02

Length 200mm




Product description

USB Type-C™ rack mount cable, female (with screws) to male, 5Gbps, 20cm, , USB 3.2 Gen.2


Technical data

- USB Type-C™ panel mounting cable / panel mount cable
- length: approx. 20cm
- Connector 1: USB Type-C™ female (can be screwed)
- screw type UNC 4/40, approx. 15mm thread length
- hole spacing approx. 25mm
- cutout for Type-C™ socket approx. 9 x 3.5mm
- Connector 2: USB Type-C™ male
- PREMIUM quality
- double shielding with braided and foil shielding
- conductor material: copper (CU)
- max. 10 Gb/s (USB 3.2 Gen.2)
- weight: 15gr (without packaging)
- component / cable for mounting in end device
- other designations: Rack Mount Cable, USB C REAR
- CE, WEEE, RoHS compliant (environmentally friendly according to current EU directives)

More images

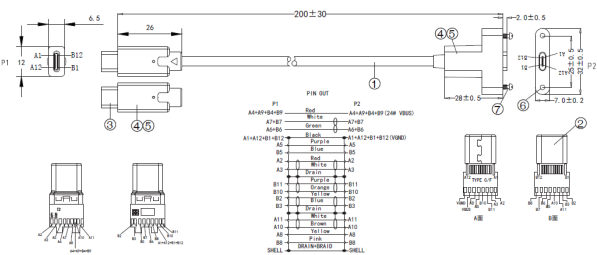

⑦	THUMB SCREW	#4-40*15 nickel-plated	2
⑥	THUMB SCREW	NUT-NICKEL PLATED(#4-40)	2
⑤	MOLDED	45P BLACK PVC	2
④	MOLDED	LDPE	2
③	Connector 1	USB 3.2 C/M Solder Type, Blue PBT Insulation, The Pin Gold Plated 150", the shell nickel-plated With PCB board	1
②	Connector 2	USB 3.2 C/F Solder Type, Blue PBT Insulation, The Pin Gold Plated 150", the shell nickel-plated With PCB board	1
①	CABLE	USB3.2 Gen2 CABLE (1P*34AWG+D+AL+MY)*4C+1P*32AWG+4C*32AWG+2C*26AWG+F+MY+AB +Jacket PVC Black OD:4.2±0.2MM	1
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y

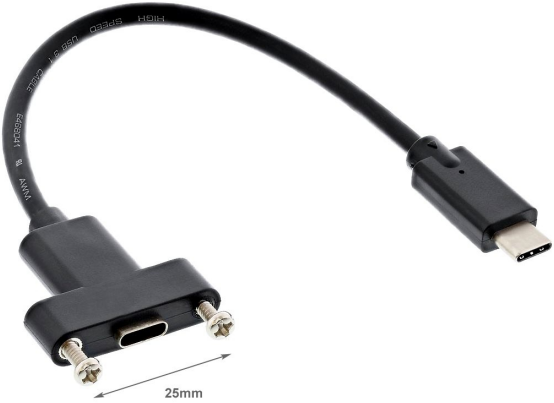

PIN OUT

P1		P2
A4+A9+B4+B9	Red	A4+A9+B4+B9 (24# VBUS)
A7+B7	White	A7+B7
A6+B6	Green	A6+B6
A1+A12+B1+B12	Black	A1+A12+B1+B12 (VGND)
A5	Purple	A5
B5	Blue	B5
A2	Red	A2
A3	White	A3
	Drain	
B11	Purple	B11
B10	Orange	B10
B2	Yellow	B2
B3	Blue	B3
	Drain	
A11	White	A11
A10	Brown	A10
A8	Yellow	A8
B8	Pink	B8
SHELL	DRAIN+BRAID	SHELL

